

Water softener MAXI VOLUMETRIC

TECHNICAL FEATURES



Weight	32 kg
Power supply	230V 50/60 Hz
	optional 120V 60 Hz
Max flow rate suggested	1500 Hz
Room temperature	4°C – 35°C
Absorbet power	4 W
Salt quantity for regeneration cycle	3 kg
Salt refill	50 kg



THE PACKAGING CONTAINS

- 1 Volumetric MAXI-255 AUTOTROL valve 760 LOGIX
- 1 Vessel 24 litres with 17 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres draine tube
- 1 Elbow overflow joint
- 1 Drain joint union

JOINT CONNECTION:

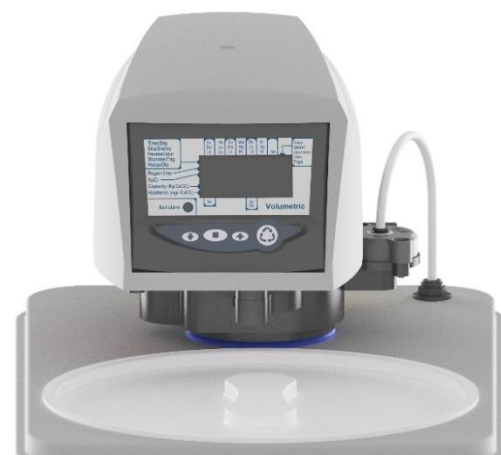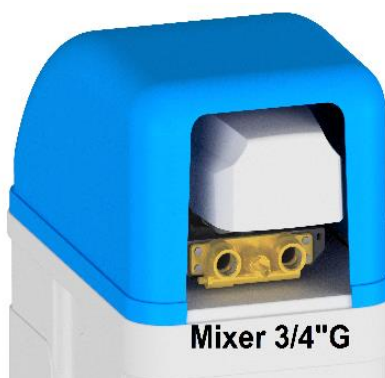

STANDARD



OPTIONAL
 Anti overflow device



OPTIONAL
 Chlorine generator device and salt alarm

ORDER CODE: T14-1



PRODUCT CODE:

- AMAX22A = AUTOMATIC SOFTENER MAXI GIX 1/2 "G VOL AC
- AMAX55A = AUTOMATIC SOFTENER MAXI GIX 3/4 "G MIX VOL AC
- AMAX22AG = AUTOMATIC SOFTENER MAXI GIX 1/2 "G VOL AC NG
- AMAX55AG = AUTOMATIC SOFTENER MAXI GIX 3/4 "G MIX VOL AC NG

LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m ³ of
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
MAXI	5040	3360	2520	2016	1680	101

