

AUTOMATIC WATER SOFTENER VOLUMETRIC NOA

TECHNICAL FEATURES

Max flow rate suggested	1400 l/h
Room temperatura	Min 4°C Max 35°C
Temperature of water supply	Min 6°C Max 25°C
Pressure of feed water	0.2 Mpa Min 2 bar 0.8 Mpa Max 8 bar
Power supply	Standard 230 V 50/60 Hz Optional 120 V 60 Hz
Absorbed power	4 W


THE PACKAGING CONTAINS

- 1 Volumetric Valve Alia
- 1 Brine tank
- 1 Vessel 8 litres in steel o nylon with 5.5 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres of unloading pipe
- 1 Overflow curved union joint
- 1,5 Metre of overflow pipe

CHARACTERISTICS OF FEED WATER

Feed water must be:


- drinkable and clean (SDI 1)
- temperature must be between 6°C to 25°C
- pressure of feed water 0,2 ÷ 0,8 Mpa (2÷8 bar)
- hardness must be below 900 ppm CaCO₃ (90°f)

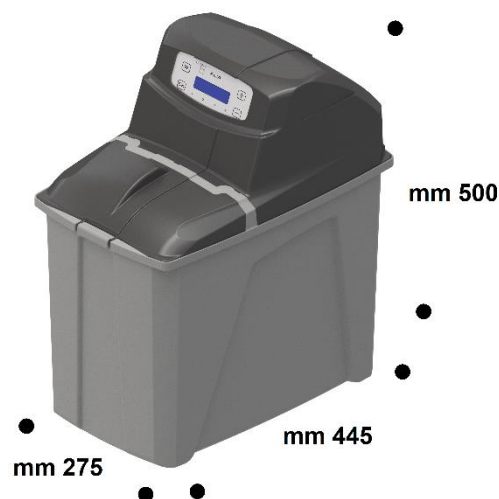

Joint 3/4" G

VERSIONS AVAILABLE:

With disinfection with anti-overflow (salt alarm)
Without disinfection with anti-overflow (check salt)

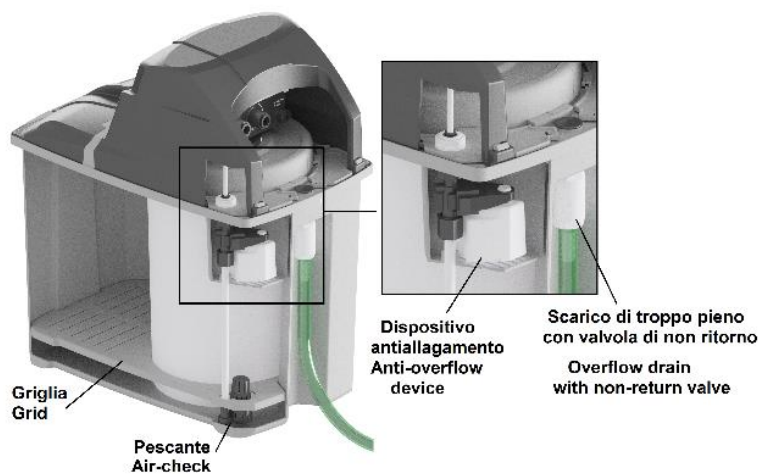

Steel Cylinder



Nylon Cylinder



ORDER CODE:

- AAN77G** = AUTOMATIC SOFTENER NOA-V 3/4"G NG with salt alarm
- AAN77BG** = AUTOMATIC SOFTENER NOA-V 3/4"G AS NG with check salt
- AAN77GY** = AUTOMATIC SOFTENER NOA-V 3/4"G NG NYLON with salt alarm
- AAN77BGY** = AUTOMATIC SOFTENER NOA-V 3/4"G AS NG NYLON with check salt

LITERS OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m ³ .°f
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
NOAV	1680	1120	840	672	560	33.6

