

## Automatic water softener AL8 Chronometric with advice "CHECK SALT"


### TECHNICAL FEATURES

Weight		12 kg
Power supply		230V 50/60 Hz
	optional	120V 60 Hz
Max flow rate suggested		1400 l/h
Room temperature		4°C – 35°C
Absorbet power		4 W
Salt quantity for regeneration cycle		1 kg
Salt refill		20 kg




### THE PACKAGING CONTAINS

- Alia Chronometric Valve "Check Salt"
- 1 Brine tank
- 1 Vessel 8 litres inox with 5.5 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres of unloading pipe
- 1 Overflow curved union joint
- 1,5 Metres of overflow pipe
- 1 By-pass joint
- 2 Taps

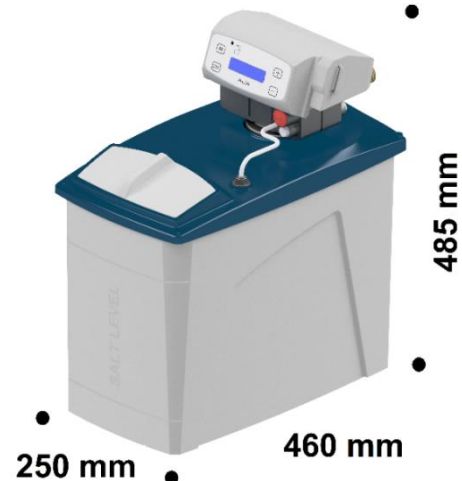

### CHARACTERISTIC OF FEED WATER

Feed water must be:  
 Drinkable and clean (SDI 1)  
 Temperature must be between 6°C and 25°C  
 Pressure of feed water 0,2 ÷ 0,8 Mpa (2÷8 bar)  
 Hardness must be below 900 ppm CaCO<sub>3</sub> (90°f)

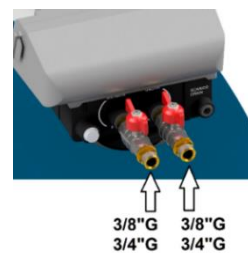

### AVAILABLE VERSIONS

- With ADVICE "CHECK SALT"
- With ADVICE "CHECK SALT" and ANTI-OVERFLOW



LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m <sup>3</sup> .°f
°d	11	16	22	28	33	
ppm CaCO <sub>3</sub>	200	300	400	500	600	
<b>AL8</b>	1680	1120	840	672	560	33.6

With ADVICE "CHECK SALT"

Code:

**AAL07B AUTOMATIC SOFTENER AL8 3/4" G AS**

**AAL08B AUTOMATIC SOFTENER AL8 3/8" G AS**



With ADVICE "CHECK SALT" and ANTI-OVERFLOW

Code:

**AAL07BG AUTOMATIC SOFTENER AL8 3/4" G AS NG**

**AAL08BG AUTOMATIC SOFTENER AL8 3/8" G AS NG**

