

Automatic water softener AL8V VOLUMETRIC

TECHNICAL FEATURES

Weight	12 kg
Power supply	230V 50/60 Hz
	optional 120V 60 Hz
Max flow rate suggested	1400 l/h
Room temperature	4°C – 35°C
Absorbet power	4 W
Salt quantity for regeneration cycle	1 kg
Salt refill	20 kg

THE PACKAGING CONTAINS



- 1 Volumetric Alia Valve
- 1 Brine tank
- 1 Vessel 8 litres inox with 5.5 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres of unloading pipe
- 1 Overflow curved union joint
- 1 Metres of overflow pipe

CHARACTERISTIC OF FEED WATER

Feed water must be:
 Drinkable and clean (SDI 1)
 Temperature must be between 6°C and 25°C
 Pressure of feed water 0,2 ÷ 0,8 Mpa (2÷8 bar)
 Hardness must be below 900 ppm CaCO₃ (90°f)

AVAILABLE VERSIONS

- With ADVICE "CHECK SALT"
- With ADVICE "CHECK SALT" and ANTI-OVERFLOW

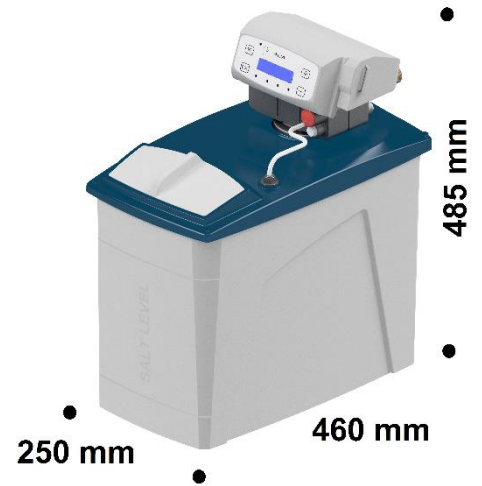


LITRES OF SOFT WATER BASED ON WATER HARDNESS							
°f	20	30	40	50	60		Cyclic Capacity m ³ .°f
°d	11	16	22	28	33		
ppm CaCO ₃	200	300	400	500	600		
AL8V	1680	1120	840	672	560	33.6	

With ADVICE "CHECK SALT"

Code:

AAL77B WATER SOFTENER AL8V 3/4" G AS

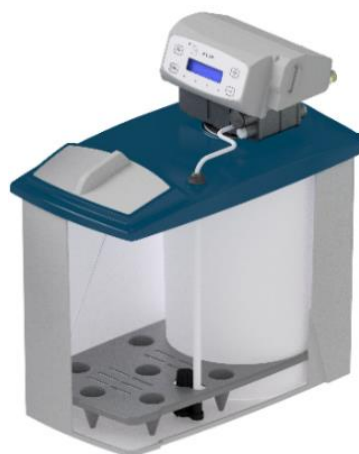

With ADVICE "CHECK SALT" and ANTI-OVERFLOW

Code:

AAL77BG WATER SOFTENER AL8V 3/4" G AS NG

