


AUTOMATIC WATER SOFTENER VOLUMETRIC GIX8V


TECHNICAL FEATURES

Weight	12 kg
Power supply	230V 50/60 Hz
optional	120V 60 Hz
Max flow rate suggested	1500 l/h
Room temperature	Min 4°C Max 35°C
Absorbet power	4 W
Salt quantity for regeneration cycle	1 kg
Salt refill	20 kg

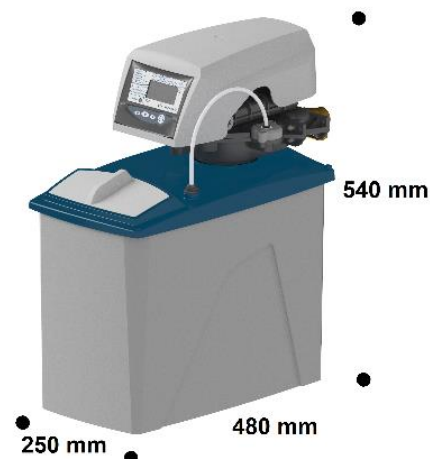

THE PACKAGING CONTAINS

- 1 255/760 Logix Autotrol Valve
- 1 Brine tank
- 1 Vessel 8 litres with 5.5 litres cationic resins adapt for softening
- 1 Instruction manual
- 3 Metres of unloading pipe
- 1 Overflow curved union joint
- 1 Drain connection
- 1 Grid

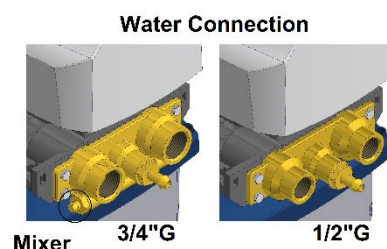

LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m 3.°f
°d	11	16	22	28	33	
ppm CaCO ₃	200	300	400	500	600	
GIX8V	1680	1120	840	672	560	33.6



ORDER CODE:

AAX22A = AUTOMATIC SOFTENER GIX8V 1/2" G AC
AAX55A = AUTOMATIC SOFTENER GIX8V 3/4" G MIX AC



ORDER CODE WITH ANTI-OVERFLOW DEVICE (OPTIONAL):

AAX22AG = AUTOMATIC SOFTENER GIX8V 1/2" G AC NG
AAX55AG = AUTOMATIC SOFTENER GIX8V 3/4" G MIX AC NG



OPTIONAL:

Chlorine generator device and salt alarm



ORDER CODE: T14-1

CHARACTERISTICS OF FEED WATER:

Feed water must be:

- Drinkable and clean (SDI1)
- Temperature must be between 6°C and 25°C
- Pressure of feed water 0,2 ÷ 0,8 Mpa (2÷8 bar)
- Hardness must be below 900 ppm CaCO₃ (90°F)

