


## L84V 255 LOGIX VOLUMETRIC AUTOMATIC WATER SOFTENER

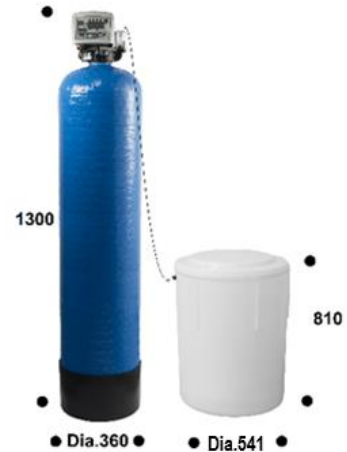

### TECNICAL FEATURES

Weight		71 kg
Power supply		230V50/60 Hz
	optional	120V 60 Hz
Max flow rate suggested		1500 l/h
Water connections		3/4" G Mix
Salt quantity for regeneration cycle		12.2 kg
Room temperature		min 4°C – max 35°C
Salt refill		100 kg

### INFEEED WATER FEATURES

Drinkable water	
Temperature	Min 6°C Max 25°C
Infeed water pressure	Min 2bar Max 8 bar
Clear water	(SDI 1)
Max water hardness	90°f

### THE SOFTENER IS COMPOSED OF

- 1 Brine tank 150 litres
- 1 255/760 Logix Autotrol Valve
- 1 Vessel 13" x 44" with 58.8 litres cationic resins adapt for softening
- 1 Instruction manual
- 4 Metres of unloading pipe
- 1 Overflow curved union joint
- 1 Drain connection
- 1 Resin disinfection kit (OPTIONAL)

### THE SOFTENER IS SUITABLE FOR

- Centralized water net for bars and kitchens

### PRODUCT CODE

L8455 Coupling 3/4" G

LITRES OF SOFT WATER BASED ON WATER HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m <sup>3</sup> of
°d	11	16	22	28	33	
ppm CaCO <sub>3</sub>	200	300	400	500	600	
<b>L84V</b>	17640	11760	8820	7056	5880	352.8

