

DVA[®]
DE VECCHI S.R.L.

WATER SOFTENERS



GAE SERIES

WATER SOFTENERS

DVA[®]
DE VECCHI S.R.L.

WHY DO I NEED A WATER SOFTENER?

It is well known that water, when heated, can create serious problems due to scale formation. Softened water, instead, does not form scale and also allows you to:

- save money on machine maintenance
- increase the implant duration and performance
- drastically reduce the amount of detergent during washing
- guarantee the absence of marks on shiny surfaces after washing.

CHARACTERISTICS



GAE12

GAE8 RC

GAE5

The GAE softeners have been designed to meet the needs of the catering sector. Thanks to their software, GAE softeners perform operations that make them unique in their category.

The optimization of the regeneration phases, allow the GAE series to use a minimum quantity of water for their regeneration program.

The GAE series of automatic softeners includes three models:

GAE5, GAE8 RC, GAE12

provided with the GAE valve in Chronometric or Volumetric version.



QUICK TO INSTALL, SIMPLE TO PROGRAM

The **GAE series** have been designed to be simple to use with intuitive programming. Installation is quick and maintenance is minimal.

Once in operation, the display will show all the information necessary to see correct operation.



PERFORMANCE


CHECK SALT

The GAE softeners are able to warn the user to check the presence of salt after having carried out some programmed regenerations. This warning will avoid that the brine run out of salt.



SALT ALARM

There is a function that helps the user to monitor the presence of salt in brine. When the salt in brine runs out, an acoustic and a visual signal will turn up.

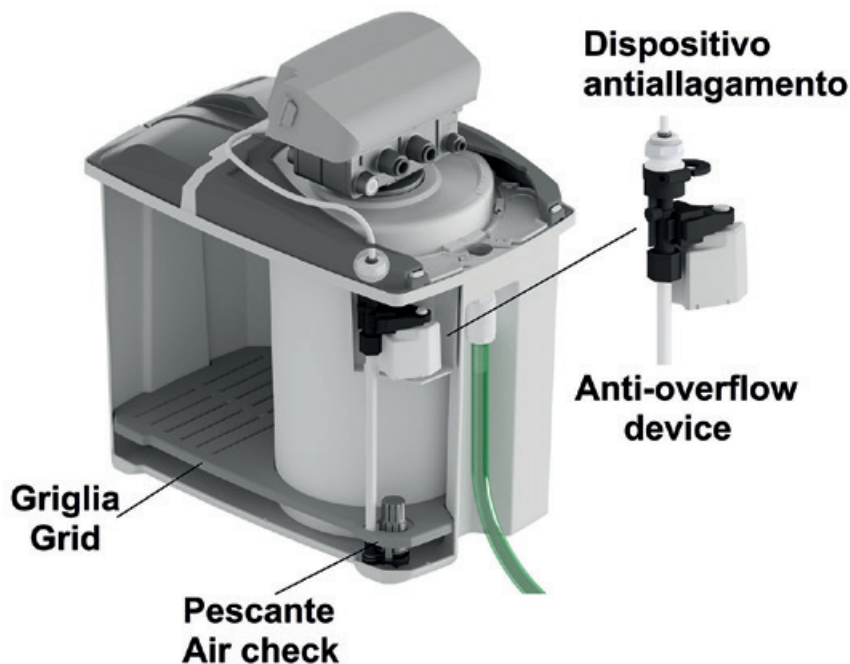

TECHNICAL SOLUTIONS

All the components inside the **GAE softeners** guarantee maximum efficiency and good operation.

The grid inside the brine dissolves the salt homogeneously for a more effective regeneration.

GAE softeners are equipped with **ANTI-OVERFLOW DEVICE** completely integrated inside, which prevents water from escaping from the brine.

CHARACTERISTICS

APPLICATIONS

Ideal to meet the needs of the bar and restaurant sectors and for all water use applications: 2/3/4 group coffee machines, cup washers, dishwashers, ice makers, steam cooking ovens.




GAE5 GAE5V

Weight	11 Kg
Regeneration salt	0,6 Kg
Salt braine tank	10 Kg
Cyclic capacity	21 m ³ °f
Resin quantity	3.5 lt



GAE8 RC GAE8V RC

Weight	12 Kg
Regeneration salt	1,0 Kg
Salt braine tank	20 Kg
Cyclic capacity	33,6 m ³ °f
Resin quantity	5.5 lt

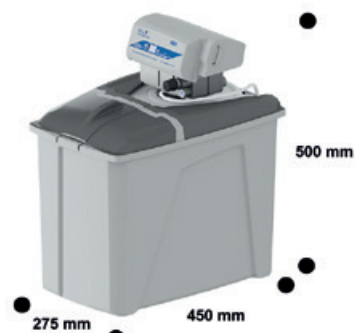


GAE12 GAE12V

Weight	15 Kg
Regeneration salt	1,5 Kg
Salt braine tank	25 Kg
Cyclic capacity	50,5 m ³ °f
Resin quantity	9 lt




Flow rate	1400 l/h
Room temperature	min 4°C - max 35°C
Temperature water	min 6°C - max 25°C
Supply water pressure	min 0.2 MPa (2 bar) – max 0.8 MPa (8 bar)
Power supply	Input 100 V - 240 V 50/60 Hz - Output 15V DC
Absorbed power	4 W

SOFT WATER LITRES BASED ON WATER HARDNESS					
°f	20	30	40	50	60
°d	11	16	22	28	33
ppm CaCO ₃	200	300	400	500	600
GAE5 - GAE5V	1050	700	525	420	350
GAE8 RC - GAE8V RC	1680	1120	840	672	560
GAE12 - GAE12V	2520	1680	1260	1008	840

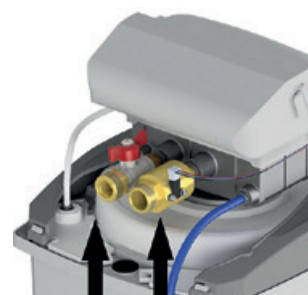

3/4" G 3/4" G
VOLUMETRIC

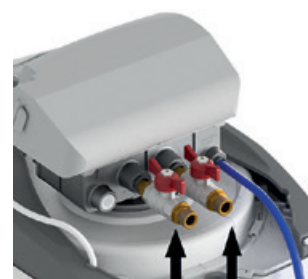

3/8" G 3/8" G
3/4" G 3/4" G
CHRONOMETRIC



SUPPLY WATER FEATURES

Supply water:

- must be drinking
- the temperature must be between min 6 °C and max 25 °C
- must be clear water (SDI 1)
- The ph must be between 3 and 11
- its hardness must be less than 900 ppm CaCO₃ (90°f)



D.M. 174

