



## AUTOMATIC WATER SOFTENER NOA

The NOA water softener is a model of the AL series designed with compact dimensions which facilitate installation even in places with limited space availability.

The release of the cylinder from the brine body allows for easier maintenance.

The overflow fitting and the anti-flooding system are an integral part of the softener.

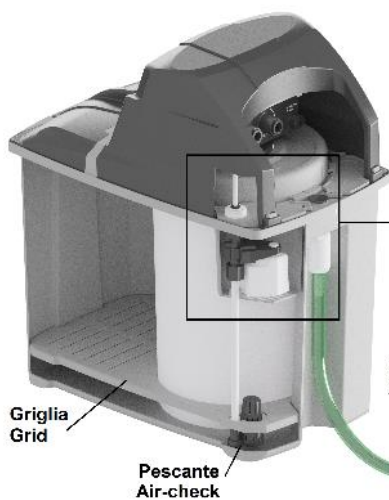

Dispositivo anti-allagamento  
Anti-overflow device

Scarico di troppo pieno con valvola di non ritorno  
Overflow drain with non-return valve



Nylon cylinder

## WATER NETWORK CONNECTIONS



**3/8" G Connection**



**3/4" G Connection**

## AVAILABLE FEATURES

With salt alarm and anti-flooding device

With check salt and anti-flooding device

TECHNICAL DATA	
Model	NOA
Weight Kg	12
Capacity	33.6
Resin volume	5.5 lt
Salt per regeneration	1.0 Kg



## TECHNICAL FEATURE

Infeed water pressure	0.1 – 0.8 MPa (1-8 bar)
Nominal flow rate	1400 l/h
Room temperature	4°C – 35°C
Water pipe connections	3/8" G – 3/4" G

## INFEEED WATER EATURES

Infeed water must be:

- Drinkable and clear
- Its temperature shall range from 6°C to 25°C
- Water hardness shall be lower than 900 ppm CaCO<sub>3</sub> (90 °f)

LITRES OF SOFTENED WATER BASED ON HARDNESS						
°f	20	30	40	50	60	Cyclic Capacity m <sup>3</sup> .°f
°d	11	16	22	28	33	
ppm CaCO <sub>3</sub>	200	300	400	500	600	
<b>NOA</b>	<b>1680</b>	<b>1120</b>	<b>840</b>	<b>672</b>	<b>560</b>	<b>33.6</b>

## THE SOFTENER IS SUITABLE FOR

Coffee machines  
Glass washers and dishwashers  
Professional ovens  
Ice makers



For additional information please contact us at [info@devecchigaetano.com](mailto:info@devecchigaetano.com)

## ORDERING CODES:

**AAN07G** = WATER SOFTENER NOA 3/4"G NG

**AAN77G** = WATER SOFTENER NOA-V 3/4"G NG

**AAN07BG** = WATER SOFTENER NOA 3/4"G AS NG

**AAN77BG** = WATER SOFTENER NOA-V 3/4"G AS NG

**AAN08G** = WATER SOFTENER NOA 3/8"G NG

**AAN08BG** = WATER SOFTENER NOA 3/8"G AS NG

**AAN07GY** = WATER SOFTENER 3/4"G NG NYLON

**AAN77GY** = WATER SOFTENER NOA-V 3/4"G NG NYLON

**AAN07BGY** = WATER SOFTENER NOA 3/4"G AS NG NYLON

**AAN77BGY** = WATER SOFTENER NOA-V 3/4"G AS NG NYLON

**AAN08GY** = WATER SOFTENER NOA 3/8"G NG NYLON

**AAN08BGY** = WATER SOFTENER NOA 3/8"G AS NG NYLON

## HYGIENIC SAFETY NORMS AND ICIM TESTING

This equipment has been tested by the ICIM S.p.a., the Italian Certification Institute for Mechanic, as its licensed laboratory, in order to certify its compliance with the following regulations:

- **Reg. n.1935/2004/CE** products and components in contact with elements according to the dispositions MOCA.
- **D.M. n.174/2004** products and components utilised in contact with feed water.

It is **MANDATORY** to use original replacements for repairs and maintenance, in order to guarantee hygienic safety and product performance.

